




- Easy, Cost Effective Installation
- More Flexible than Split Convuluted or Spiral Wrap
- 25% Edge Overlap
- Retains Shape & Rigidity Throughout -94°F to 257°F Temp. Range
- Melt Temp 482°F

Flexible, Semi-Rigid Wrappable Split Braided Tube


FLEXO® F6's® (F6N) unique split, semi-rigid braided construction makes it the ideal solution for situations where ease of installation is of primary importance. The lateral split allows the tube to open up to accommodate a wide variety of bundling requirements, while the semi-rigid braid configuration simply closes around the entire installation without the need for any additional fasteners (Velcro, tape, etc.). The 10 mil PET braid is lightweight, quiet, and flexible. The 25% edge overlap (at nominal diameter) allows for coverage around inline plugs, connectors, and splices.

F6N will bend to a tight radius without distorting or splitting open, and unlike full rigid tubing, will not impair or affect the flexibility of harnesses. F6® allows for addition or removal of wires without disassembly.



The large overlap allows easy installation over splices and inline connectors without exposing wires and cables.

F6® Installation Tool
This simple tool makes installing long lengths of F6® sleeving a breeze. See part numbers on page 118.

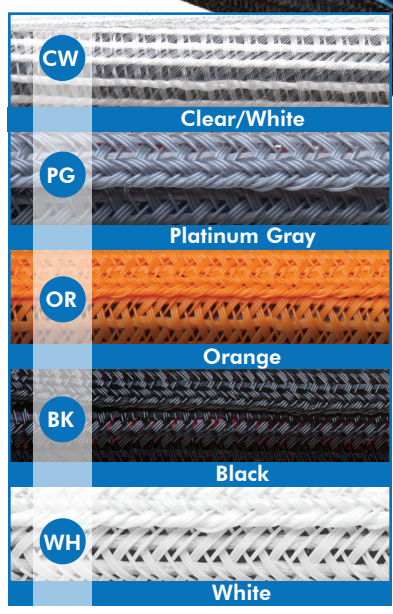

Nominal Size	Part #	Wall Thickness	Standard Put-Ups			Available Colors	Lbs/100'
			Bulk Box	Box A	Box B		
1/8"	F6N0.13	.024"	8,000'	400'	100'	CW, PG, OR, BK	0.47
1/4"	F6N0.25	.025"	3,000'	200'	100'	CW, PG, OR, BK, WH	0.60
3/8"	F6N0.38	.025"	1,500'	150'	75'	CW, PG, OR, BK, WH	1.20
1/2"	F6N0.50	.025"	1,200'	150'	75'	CW, PG, OR, BK, WH	1.40
3/4"	F6N0.75	.025"	500'	100'	50'	CW, PG, OR, BK, WH	1.60
1"	F6N1.00	.038"	400'	100'	50'	CW, PG, OR, BK, WH	2.00
1 1/4"	F6N1.25	.038"	250'	75'	25'	CW, PG, OR, BK, WH	2.40
1 1/2"	F6N1.50	.038"	250'	75'	25'	CW, PG, OR, BK, WH	2.70
2"	F6N2.00	.038"	200'	50'	25'	CW, PG, OR, BK, WH	3.60





F6® is available in self-dispensing boxes.

360° of Complete Coverage of Flexible, Semi-Rigid Braided Conduit



F360° is an innovative conduit designed to encase your wires with a flexible structure. F360's circular shape is lightweight yet extremely strong. Utilizing our now famous F6® style triaxial braid technology, this new design will solve situations that need additional security and tamper resistance. The full 360° degree enclosure makes a sturdy wire duct while still remaining breathable and light. Feeding wires through F360° is easy due to the ridged design.

Nominal Size	Part #	Wall Thickness	Standard Put-Ups			Available Colors	Lbs/100'
			Bulk Box	Box A	Box B		
3/8"	F360.38BK	.028"	1,500'	150'	75'	Black (BK)	0.83
1/2"	F360.50BK	.028"	1,200'	150'	75'	Black (BK)	1.14
3/4"	F360.75BK	.028"	500'	100'	50'	Black (BK)	1.53
1"	F3601.00BK	.028"	400'	100'	50'	Black (BK)	1.67
1 1/4"	F3601.25BK	.028"	250'	75'	25'	Black (BK)	2.26
1 3/8"	F3601.38BK	.028"	200'	75'	25'	Black (BK)	2.48
1 1/2"	F3601.50BK	.040"	200'	75'	25'	Black (BK)	3.90
2"	F3602.00BK	.040"	100'	50'	25'	Black (BK)	5.37

- **Soft and Quiet in High Vibration Uses**
- **Cut and Abrasion Resistant**
- **Halogen Free**
- **Chemically Inert**
- **Retains Shape & Rigidity Throughout -94°F to 257°F Temp. Range**

