




ENERGETIC®
L I G H T I N G



E3SB LED Area Lighting Fixture


FORM meets FUNCTION

Energetic Lighting's multi-purpose area light combines high-performance with an elegant streamline profile design to surpass your lighting needs while enhancing site aesthetics.

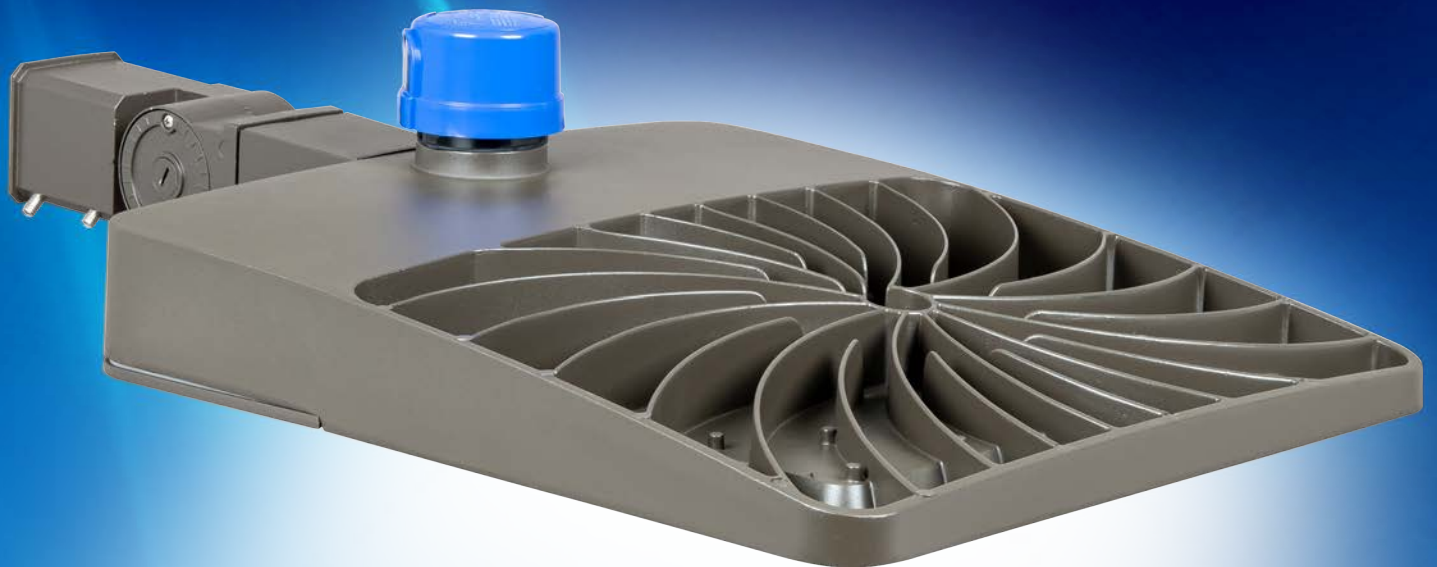

Features Overview

The E3SB series area light has been meticulously engineered to meld together functionality, versatility, along with practicality. Packed into an efficient compact rugged housing ready for any application.

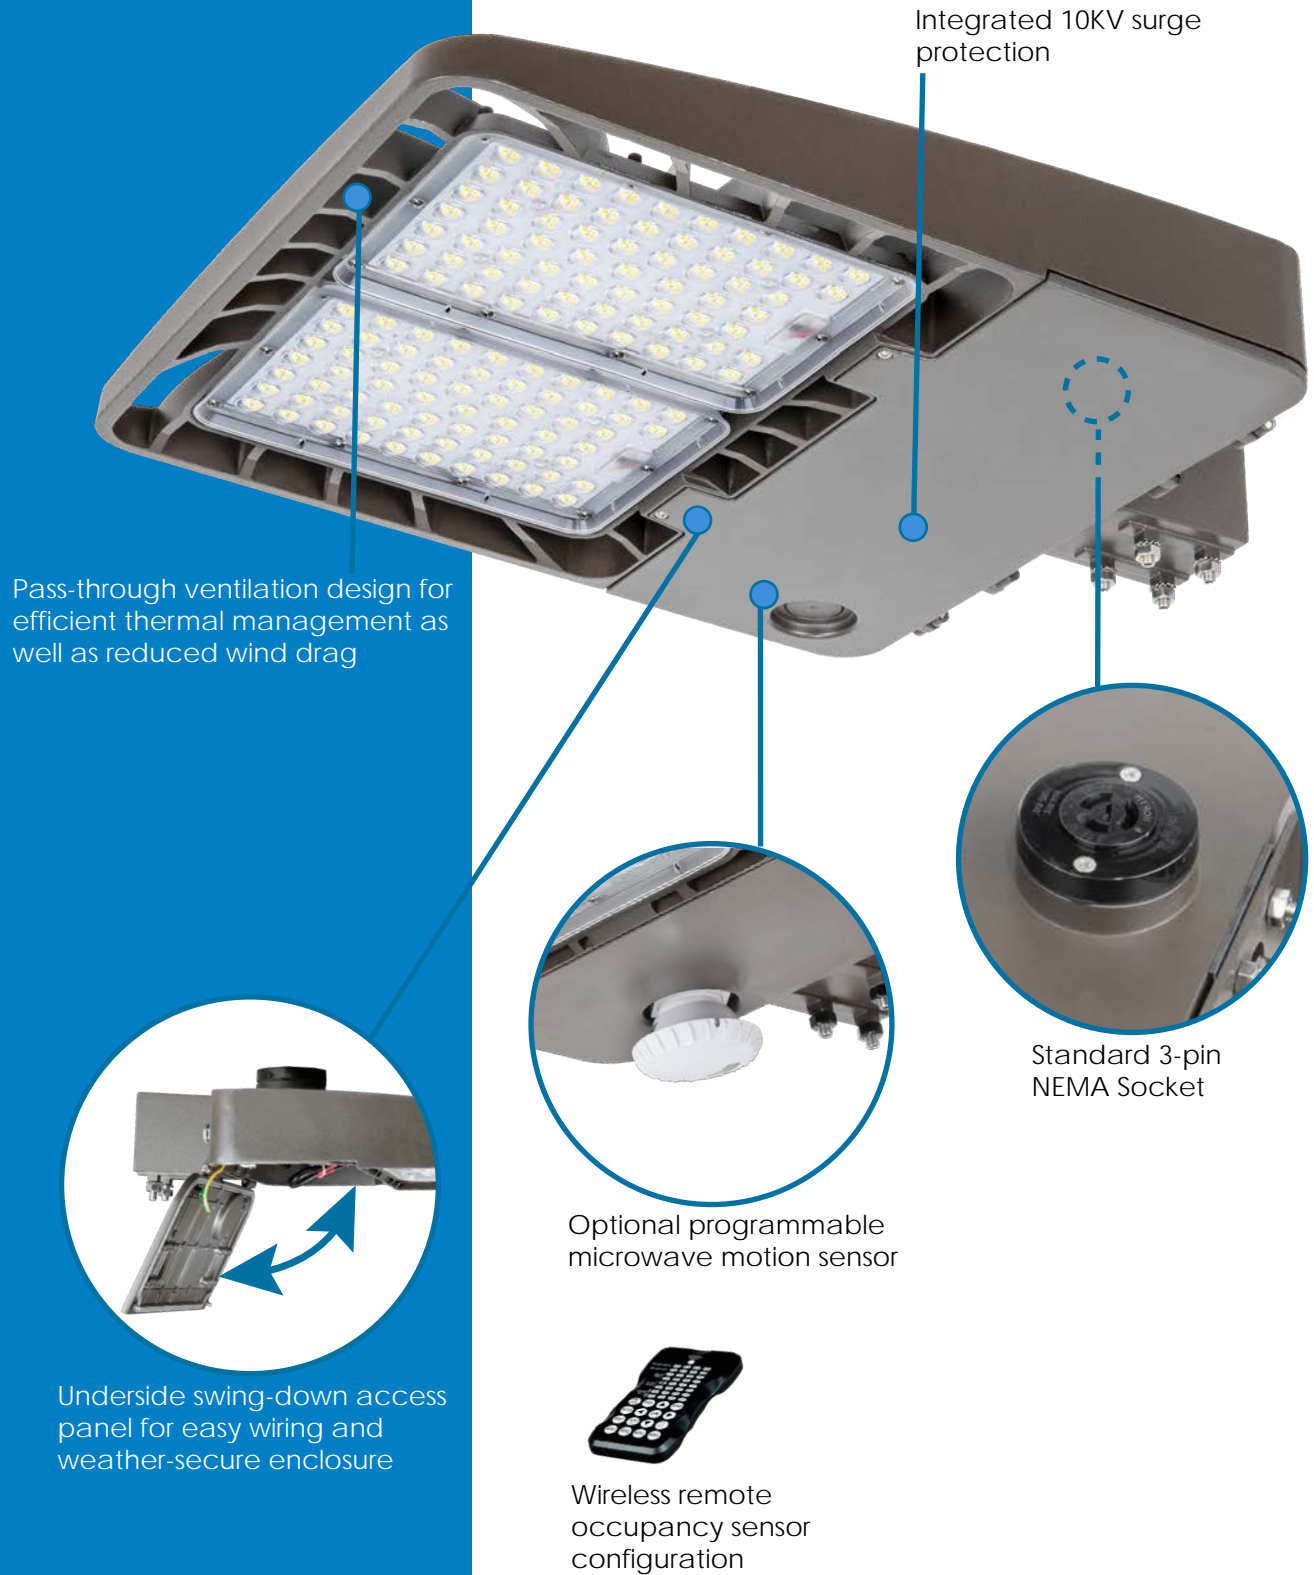

Modular Mounting Options:


Three mounting options are available to fit any type of application: fixed post-mount arm, adjustable angle round slip-fitter, and adjustable trunnion



E3SB-ARM
Fixed-angle extension
round or flat post surface



E3SB-A1
Adjustable-pitch
slip-fitter

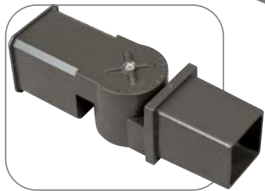

E3SB-SVL
Adjustable-pitch
trunnion - surface mount



E3SB Series

LED Area Lighting Fixture



Model number nomenclature:

Series Prefix	Input Voltage	Wattage	Photocontrol Options	Optics/Distribution	Controls Options	CRI	CCT	Alternate Options
E3SB	[Blank] 120-277Vac H 347-480Vac	100 100W 150 156W 240 254W 300 315W 350 366W	[Blank] none L NEMA Photocell	3 Type III dist. 5 Type V dist.	[Blank] none M Microwave Occupancy Sensor	7 70 CRI	50 5000K 40 4000K 30 3000K	[Blank] none S Includes NEMA shorting cap and no mounting hardware

Universal Voltage 120-277Vac, Type III Optics


Catalog Logic	Order #	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	Certifications
E3SB100L3-750	75041	14584 LM	100	146	5000	70	120-277	0-10v	UL, DLC5-P
E3SB150L3-750	75043	22388 LM	156	144	5000	70	120-277	0-10v	UL, DLC5-P
E3SB240L3-750	75045	36435 LM	254	143	5000	70	120-277	0-10v	UL, DLC5-P
E3SB300L3-750	75047	44640 LM	315	141	5000	70	120-277	0-10v	UL, DLC5-P
E3SB350L3-750	75049	50505 LM	366	138	5000	70	120-277	0-10v	UL, DLC5-P

High Voltage 347-480Vac, Type III Optics

Catalog Logic	Order #	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	Certifications
E3SBH100L3-750	75051	15218 LM	101.9	149	5000	70	347-480	No	UL
E3SBH150L3-750	75053	22245 LM	149.4	148	5000	70	347-480	No	UL
E3SBH240L3-750	75055	36459 LM	237.6	153	5000	70	347-480	No	UL
E3SBH300L3-750	75057	45601 LM	299.4	152	5000	70	347-480	No	UL
E3SBH350L3-750	75059	49962 LM	347.8	143	5000	70	347-480	No	UL

Note: The models listed above are common configurations, variations may be configured using the model number nomenclature chart.

Dimensions

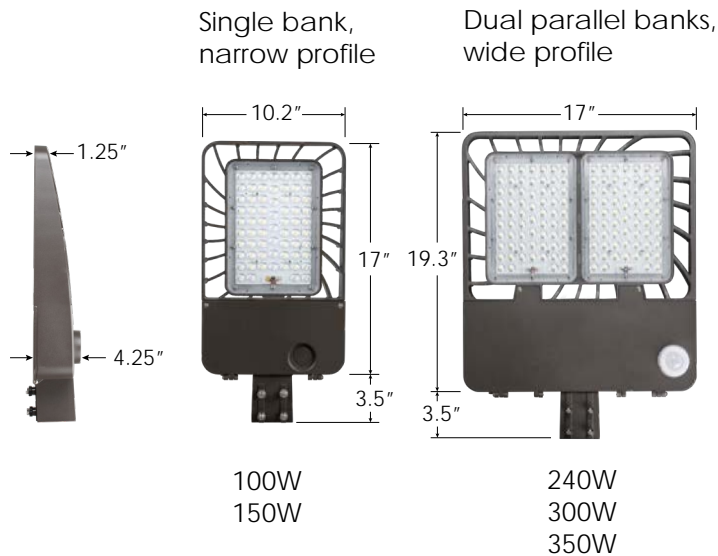

Accessories and Options

Catalog Logic	Order #	Description
E3SB-A1	75037	Slip-fitter mount
E3SB-ARM	75038	Fixed-angle arm
E3SB-SVL	75039	Trunnion surface mount
NPCELL277-3P	98023	NEMA 3-pin Photocell 120-277V
NPCELL480-3P	98004	NEMA 3-pin Photocell 480V
ZUV70A001	80026	Wireless remote for occupancy sensor